

# Super-Luminescent Light Emitting Diode Device


## IPSDD1509 (1550nm)

#### **Features**

- Wide Optical Bandwidth
- · Very Low Spectral Ripple
- · High Output Power in SM/or PM Fiber

## **Applications**

- · Broadband Light Source for Insertion Loss Test
- · Distributed Fiber Optic Sensor (FOS)
- · Biomedical Imaging Device
- · OCT Diagnostic System
- Un-cooled Sensor System

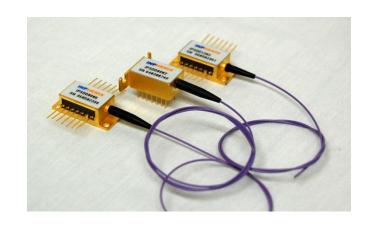

## **Device Specifications**

Domamatan	Cb al	N/:	Т	Man	T I24
Parameter	Symbol	Min.	Тур.	Max.	Unit
Central Wavelength	$\lambda_{\mathrm{c}}$	1520	1550	1575	nm
3dB Bandwidth	$\Delta\lambda_{3 ext{dB}}$	80	90	-	nm
Output Power in SM Fiber	Po	6	8	-	mW
Spectral Modulation Depth <sub>p-p</sub>	Δ	-	0.50	1.00	dB
Operating Current	$I_{F}$	-	300	400	mA
Back Facet Monitor	Available upon request				


## **Absolute Maximum Ratings**

Parameter	Min.	Max.	Unit	
Operating Temperature	- 20	70	°C	
Storage Temperature	<b>-40</b>	85	°C	
TEC Drive Current	-	1.5	A	
TEC Drive Voltage	=	3.6	V	
Maximum Current	450 mA			
Thermistor Resistance	10kΩ @ 25°C			
SLD Chip Temperature Setting	25°C			
Fiber Type	SMF/PMF/MMF			
Fiber Jacket	250μm tight buffer with 900μm loose tube			
Package	14-pin DIL/14-pin BUT/8-pin BUT			
Lead Solder Temperature	260°C for 10 Seconds			



## **Product Specification, Revision 1.51**

## **Package Dimensions**

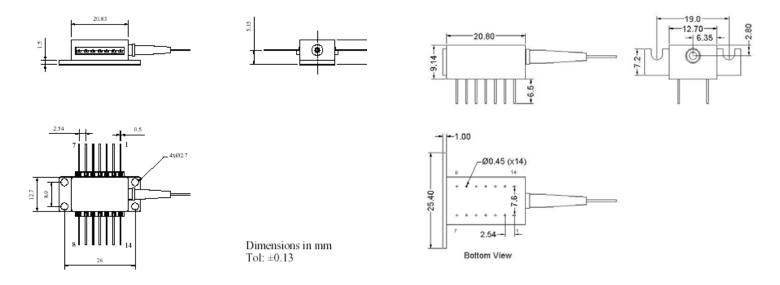

14-Pin BUT Package


14-Pin DIL Package

## **Pin Definition**

14-pin BUT package			14-pin DIL package					
Pin	Function	Pin	Function	Pin	Pin Function Pin		Function	
1	TEC (+)	8	NC	1	TEC (+)	8	NC	
2	Thermistor	9	NC	2	NC	9	SLD (-)	
3	NC	10	SLD (+)	3	NC	10	Case	
4	NC	11	SLD (-)	4	NC	11	Thermistor	
5	Thermistor	12	NC	5	SLD (+)	12	Thermistor	
6	NC	13	Case	6	NC	13	NC	
7	NC	14	TEC (-)	7	NC	14	TEC (-)	

• If the SLD is ordered with a Back Facet Monitor, Pin 7 is PD-Cathode and Pin 8 is PD+Anode



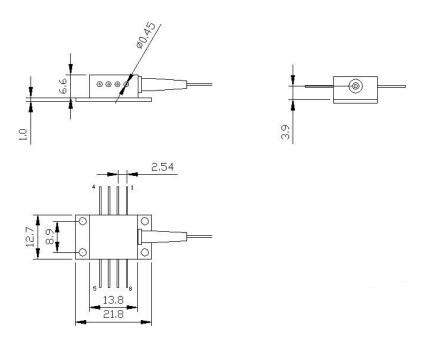

8-Pin BUT Package

## **Pin Definition**

8-pin BUT package				
Pin	Function			
1	TEC (+)			
2	NC			
3	NC			
4	SLED (+)			
5	SLED (-)			
6	Thermistor			
7	Thermistor			
8	TEC (-)			



## **Part Numbering System**

		IPSDI	DXXXX	$\vdash \Box$		
Model: IPSDDXXXX: SLD	 Device					
Package: 1: 14-pin DIL 2: 8-pin Butterfly 3: 14-pin Butterfly	_					
Fiber Type: 1: SM Fiber 2: PM Fiber	3: MN	M Fiber				
Jacket Type: 1: 900μm 2: 250μm tight buffer	<u> </u>					
<b>Connector Type:</b>						
0: No Connector 3: FC/APC 4: FC/UPC	7: SC. 8: SC.					

#### **Back Facet Monitor:**

Available upon request

**Example:** IPSDD0805-1224: 850nm SLD in 14-pin DIL with 250µm tight buffered PM Fiber with FC/UPC connectors

#### **Corporate Office**

250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com