SLD Light Source Desktop

Part Number: IPSDM1001-××××

1. Configuration

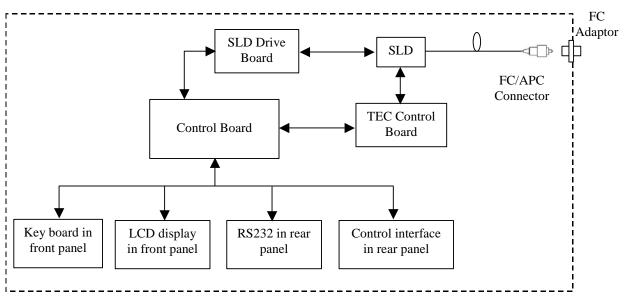


Figure 1 Configuration of IPSDM1001-×××× SLD light source desktop

2. Absolute Maximum Ratings

| Parameter | Min. | Тур. | Max. | Unit |
|----------------------|------|------|------|------|
| Power Supply Voltage | 100 | - | 240 | VAC |
| Storage Temperature | -40 | - | +85 | °C |
| Humidity | 10 | - | 100 | % |

3. Recommended Operational Condition

| Parameter | Min. | Тур. | Max. | Unit |
|-----------------------|------|------|------|------|
| Operating Temperature | 10 | 25 | 35 | °C |
| Operating Humidity | 30 | 60 | 75 | % |

4. Optical characteristics

| Items | Specifications | | Items Specifications | | Unit | Notes |
|-------------------------|-------------------|------|----------------------|----|--|-------|
| | Min. | Тур. | Max. | | | |
| Center Wavelength | - | 1020 | - | nm | @ 25°C, CW optical | |
| (at center of FWHM) | | | | | output and optical | |
| 3dB Optical Bandwidth | - | 100 | - | nm | connector included. | |
| Optical Output Power | - | 10 | - | mW | | |
| ASE Ripple @ 0.1nm | - | 0.15 | - | dB | | |
| Optical Power Stability | - | - | ±0.1 | dB | Stability test of P _{max} after | |
| (8hr) | | | | | 0.5 hour warm up at 25°C | |
| Optical Interface | FC Female Adapter | | - | | | |
| Fiber Connector | FC/APC | | - | | | |
| Optical Isolator | None included | | - | | | |
| Fiber type | SMF/PMF/MMF | | - | | | |

5. Electrical characteristics

| Item | Spe | cificatio | ons | Unit | Notes | | |
|-----------------------|-----------|-----------|---------|------|------------------------------|--|--|
| Item | Min. | Тур. | Max. | Unit | notes | | |
| Power Control | Current | control | for | - | Press keyboard in the front | | |
| | SLD | | | | panel manually, or via | | |
| | | | | | RS232 by computer. | | |
| SLD Drive Current | SLD dri | ve curre | ent | - | Or get data through RS232. | | |
| Monitor | display | on Scree | en | | | | |
| Keyboard lock | Lock & | Key sw | itch | - | A keyboard disable switch in | | |
| | for front | panel | | | the rear panel. | | |
| | buttons' | activati | ion | | | | |
| Connector for RS232 | DB9 Co | nnector | , Male. | - | In the rear panel | | |
| Connector for Control | DB9 Co | nnector | , | _ | | | |
| | Female. | | | | | | |

6. Physical Dimensions and Mechanical Specifications

Size: 344mm(W)×260mm(D)×90mm(H)

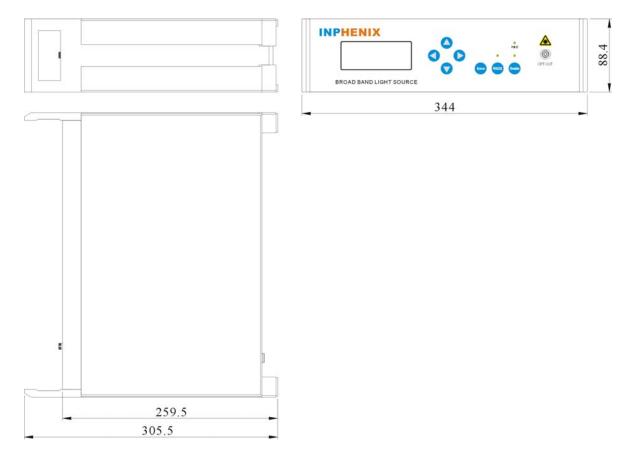


Figure 2 Mechanical drawing of IPSDM1001-×××8 SLD light source desktop

7. Part Numbering Structure of SLD light source desktop

| IPSDM | | |
|---------------------------------------|--|--|
| Model Number | | |
| 07**: 700~790nm SLD | | |
| 08**: 800~890nm SLD | | |
| 09**: 900~990nm SLD | | |
| 10**: 1010~1090nm SLD | | |
| 13**: 1300~1390nm SLD | | |
| 14**: 1400~1490nm SLD | | |
| 15**: 1500~1590nm SLD | | |
| Output Type | | |
| 0: FC Adaptor | | |
| 1: Pigtail fiber | | |
| Connector Type | | |
| 0: No Connectors | | |
| 3: FC/APC 4: FC/UPC | | |
| 7: SC/APC 8: SC/UPC | | |
| Fibon Type | | |
| Fiber Type 1: SM Fiber | | |
| 2: PM Fiber | | |
| 3: MM Fiber | | |
| | | |
| Case Size | | |
| 8. $3/4 \times 260 \times 90$ mm case | | |

8: 344×260×90mm case 9: 450×300×90mm case

Example: IPSDM0701-0318: 700nm-type SLD light source desktop in 344×260×90mm case with FC adaptor output, 900µm SM fiber with FC/APC connector.

Corporate Office 250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com