

SLD Light Source Desktop

Part Number: IPSDM1006-xxx

1. Configuration

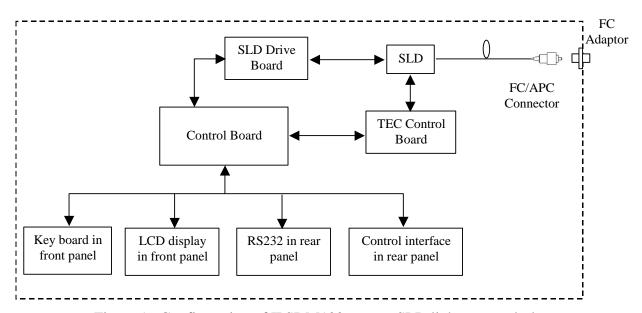


Figure 1 Configuration of IPSDM1006-×××× SLD light source desktop

2. Absolute Maximum Ratings

| Parameter | Min. | Typ. | Max. | Unit |
|----------------------|------|------|------|------|
| Power Supply Voltage | 100 | - | 240 | VAC |
| Storage Temperature | -40 | - | +85 | °C |
| Humidity | 10 | - | 100 | % |

3. Recommended Operational Condition

| Parameter | Min. | Typ. | Max. | Unit |
|-----------------------|------|------|------|------|
| Operating Temperature | 10 | 25 | 35 | °C |
| Operating Humidity | 30 | 60 | 75 | % |



4. Optical characteristics

| Items | Items Specifications | | Unit | Notes | |
|-------------------------|----------------------|------|------|-------|--|
| | Min. | Typ. | Max. | | |
| Center Wavelength | 1010 | 1020 | 1030 | nm | @ 25°C, CW optical |
| (at center of FWHM) | | | | | output and optical |
| 3dB Optical Bandwidth | 100 | 110 | - | nm | connector included. |
| Optical Output Power | 5 | 8 | - | mW | |
| ASE Ripple @ 0.1nm | - | 0.1 | 0.2 | dB | |
| Optical Power Stability | - | - | ±0.1 | dB | Stability test of P _{max} after |
| (8hr) | | | | | 0.5 hour warm up at 25°C |
| Optical Interface | FC Female Adapter | | - | | |
| Fiber Connector | FC/APC | | - | | |
| Optical Isolator | None included | | - | | |
| Fiber type | SMF/PMF/MMF | | - | | |

5. Electrical characteristics

| Item | Spe | cificatio | ons | Unit | Notes | |
|-----------------------|---------------------|-----------|---------|-----------------------------|------------------------------|--|
| Item | Min. | Typ. | Max. | | Notes | |
| Power Control | Current control for | | - | Press keyboard in the front | | |
| | SLD | | | panel manually, or via | | |
| | | | | | RS232 by computer. | |
| SLD Drive Current | SLD dri | ve curre | ent | - | Or get data through RS232. | |
| Monitor | display of | on Scree | en | | | |
| Keyboard lock | Lock & | Key sw | itch | - | A keyboard disable switch in | |
| | for front | panel | | | the rear panel. | |
| | buttons' | activati | ion | | | |
| Connector for RS232 | DB9 Co | nnector | , Male. | 1 | In the rear panel | |
| Connector for Control | DB9 Co | nnector | , | - | | |
| | Female. | | | | | |



6. Physical Dimensions and Mechanical Specifications

Size: 344mm(W)×260mm(D)×90mm(H)


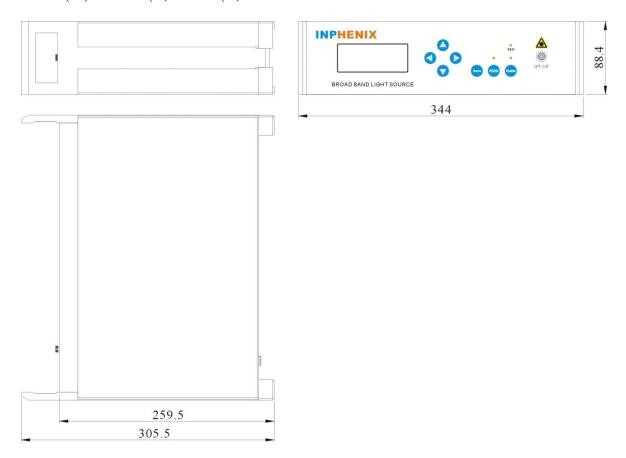


Figure 2 Mechanical drawing of IPSDM1006-xxx8 SLD light source desktop



7. Part Numbering Structure of SLD light source desktop

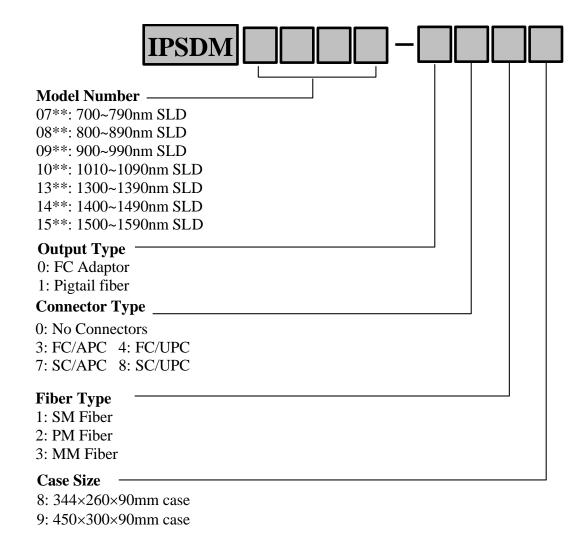

Example: IPSDM0701-0318: 700nm-type SLD light source desktop in $344\times260\times90$ mm case with FC adaptor output, $900\,\mu$ m SM fiber with FC/APC connector.

Corporate Office

250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com