

SLD Light Source Desktop

Part Number: IPSDM1303-×××

1. Configuration

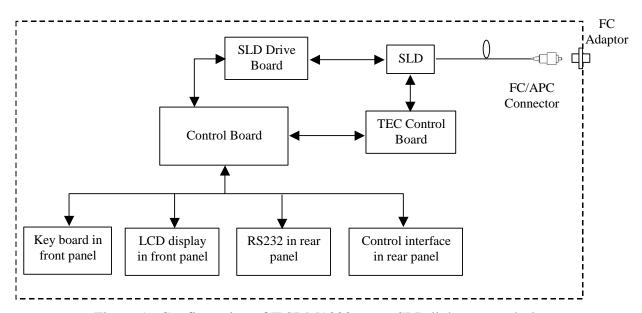


Figure 1 Configuration of IPSDM1303-×××× SLD light source desktop

2. Absolute Maximum Ratings

Parameter	Min.	Typ.	Max.	Unit
Power Supply Voltage	100	-	240	VAC
Storage Temperature	-40	-	+85	°C
Humidity	10	-	100	%

3. Recommended Operational Condition

Parameter	Min.	Тур.	Max.	Unit
Operating Temperature	10	25	35	°C
Operating Humidity	30	60	75	%



4. Optical characteristics

Items	Specifications		Unit	Notes	
	Min.	Typ.	Max.		
Center Wavelength	1280	1310	1360	nm	@ 25°C, CW optical
(at center of FWHM)					output and optical
3dB Optical Bandwidth	50	55	-	nm	connector included.
Optical Output Power	5	7	-	mW	
ASE Ripple @ 0.1nm	-	0.2	0.5	dB	
Optical Power Stability	-	-	±0.1	dB	Stability test of P _{max} after
(8hr)					0.5 hour warm up at 25°C
Optical Interface	FC Female Adapter		-		
Fiber Connector	FC/APC		-		
Optical Isolator	None included		-		
Fiber type	SMF/PMF/MMF		-		

5. Electrical characteristics

Item	Specifications	Unit	Notes
Item	Min. Typ. Max.		Notes
Power Control	Current control for	-	Press keyboard in the front
	SLD		panel manually, or via
			RS232 by computer.
SLD Drive Current	SLD drive current	-	Or get data through RS232.
Monitor	display on Screen		
Keyboard lock	Lock & Key switch	-	A keyboard disable switch in
	for front panel		the rear panel.
	buttons' activation		
Connector for RS232	DB9 Connector, Male.	-	In the rear panel
Connector for Control	DB9 Connector,	_	
	Female.		



6. Physical Dimensions and Mechanical Specifications

Size: 344mm(W)×260mm(D)×90mm(H)


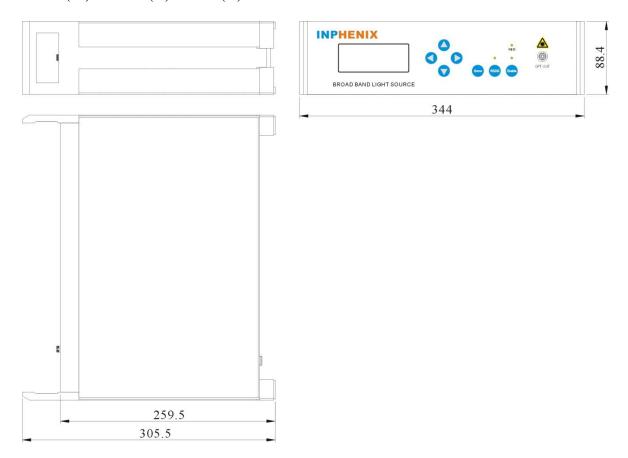


Figure 2 Mechanical drawing of IPSDM1303-xxx8 SLD light source desktop



7. Part Numbering Structure of SLD light source desktop

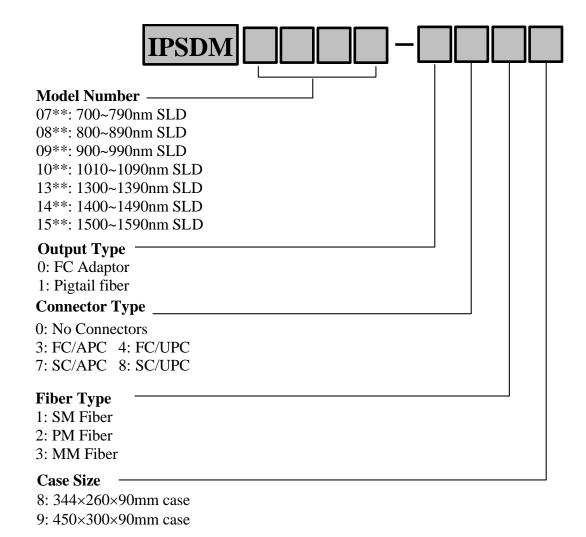

Example: IPSDM0701-0318: 700nm-type SLD light source desktop in $344\times260\times90$ mm case with FC adaptor output, $900\,\mu$ m SM fiber with FC/APC connector.

Corporate Office

250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com