### **SLD Light Source Desktop**

Part Number: IPSDM1504-×××

#### 1. Configuration

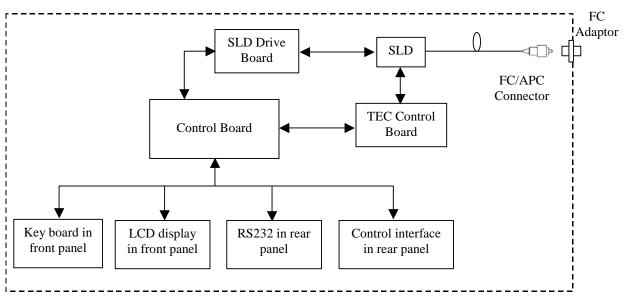


Figure 1 Configuration of IPSDM1504-×××× SLD light source desktop

#### 2. Absolute Maximum Ratings

Parameter	Min.	Тур.	Max.	Unit
Power Supply Voltage	100	-	240	VAC
Storage Temperature	-40	-	+85	°C
Humidity	10	-	100	%

#### 3. Recommended Operational Condition

Parameter	Min.	Тур.	Max.	Unit
Operating Temperature	10	25	35	°C
Operating Humidity	30	60	75	%

### 4. Optical characteristics

Items	Spe	cificatio	ns	Unit	Notes
	Min.	Тур.	Max.		
Center Wavelength	1535	1550	1575	nm	@ 25°C, CW optical
(at center of FWHM)					output and optical
3dB Optical Bandwidth	55	60	-	nm	connector included.
Optical Output Power	8	10	-	mW	
ASE Ripple @ 0.1nm	-	0.2	0.5	dB	
Optical Power Stability	-	-	±0.1	dB	Stability test of P <sub>max</sub> after
(8hr)					0.5 hour warm up at 25°C
Optical Interface	FC Female Adapter			-	
Fiber Connector	FC/APC		-		
Optical Isolator	None included		-		
Fiber type	SMF	/PMF/M	MF	-	

### **5.** Electrical characteristics

Item	Specifications			Unit	Notes		
Item	Min.	Тур.	Max.	Unit	notes		
Power Control	Current	control	for	-	Press keyboard in the front		
	SLD				panel manually, or via		
					RS232 by computer.		
SLD Drive Current	SLD dri	ve curre	ent	-	Or get data through RS232.		
Monitor	display	on Scree	en				
Keyboard lock	Lock &	Key sw	itch	-	A keyboard disable switch in		
	for front	panel			the rear panel.		
	buttons'	activati	ion				
Connector for RS232	DB9 Co	nnector	, Male.	-	In the rear panel		
Connector for Control	DB9 Co	nnector	,	_			
	Female.						

#### 6. Physical Dimensions and Mechanical Specifications

#### Size: 344mm(W)×260mm(D)×90mm(H)

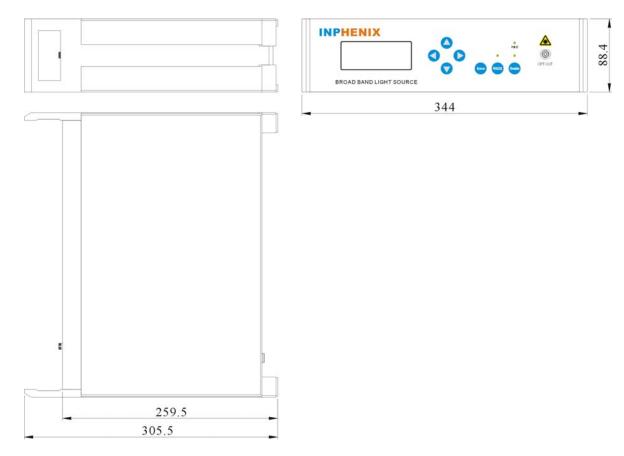


Figure 2 Mechanical drawing of IPSDM1504-×××8 SLD light source desktop

#### 7. Part Numbering Structure of SLD light source desktop

	IPSDM			
Model Number 07**: 700~790 08**: 800~890 09**: 900~990 10**: 1010~10	nm SLD nm SLD nm SLD			
10**: 1010~10 13**: 1300~13 14**: 1400~14 15**: 1500~15 <b>Output Type</b>	90nm SLD 90nm SLD			
0: FC Adaptor 1: Pigtail fiber Connector Typ				
0: No Connecto 3: FC/APC 4: 7: SC/APC 8:	FC/UPC			
Fiber Type 1: SM Fiber 2: PM Fiber 3: MM Fiber				
<b>Case Size</b> —	<b>mm</b> 0000			

8: 344×260×90mm case 9: 450×300×90mm case

Example: IPSDM0701-0318: 700nm-type SLD light source desktop in 344×260×90mm case with FC adaptor output, 900µm SM fiber with FC/APC connector.

Corporate Office 250 North Mines Rd Livermore, CA 94551 Tel: 925.606.8809 Fax: 925.606.8810 www.inphenix.com sales@inphenix.com

All information contained herein is believed to be accurate and is subject to change without notification. No responsibility is assumed. Please contact InPhenix for more information. InPhenix and the InPhenix logo are trademarks of InPhenix Inc. All rights are reserved.